

WP12-12 12Volt 12Ah

Specifications

Nominal Voltage(V) **12V**

Nominal Capacity

20 hour rate	(0.6A)	to	10.50V	12Ah
10 hour rate	(1.14A)	to	10.50V	11.4Ah
5 hour rate	(2.04A)	to	10.20V	10.2Ah
1 C	(12A)	to	9.60V	6.8Ah
3 C	(36A)	to	9.60V	4.8Ah

Weight **Approx. 4.1kg(9.02Lbs.)**

Internal Resistance (at 1KHz) **Approx. 13 mΩ**

Maximum Discharge Current for

5 seconds: **180A**

Charging Methods at 25 (77)

Cycle use:

Charging Voltage **14.4 to 15.0V**

Coefficient -5.0mV/ /cell

Maximum Charging Current : **3.6A**

Standby use:

Float Charging Voltage **13.5 to 13.8V**

Coefficient -3.0mV/ /cell

Operating Temperature Range

Charge **-15 (5) to 40 (104)**

Discharge **-15 (5) to 50 (122)**

Storage **-15 (5) to 40 (104)**

Charge Retention (shelf life) at 20 (68)

1 month **92%**

3 month **90%**

6 month **80%**

Case Material **ABS UL94 HB**


Option: Flammability resistance of (UL94 V-0)

Terminal **F1 or F2 (Faston Tab 187 or 250)**




Dimensions


mm(inch)

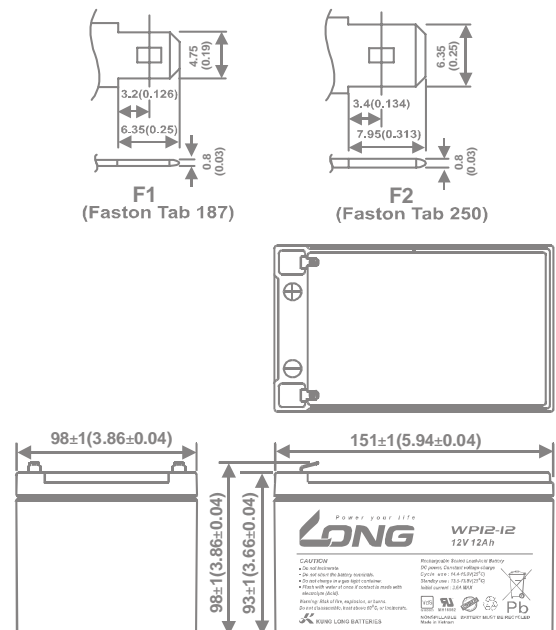


(V) Discharge Time VS. Discharge Current (25)

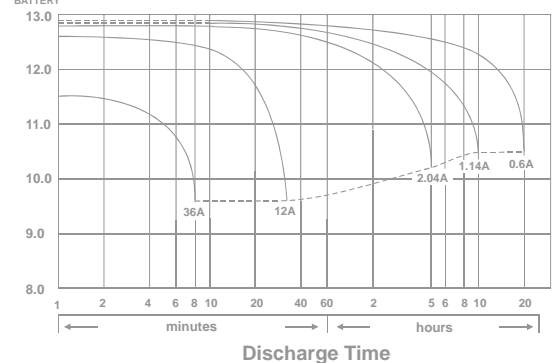


Effect of Temperature on Capacity 25 (77)

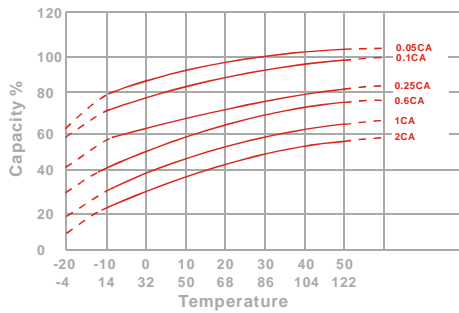


Capacity Retention Characteristic

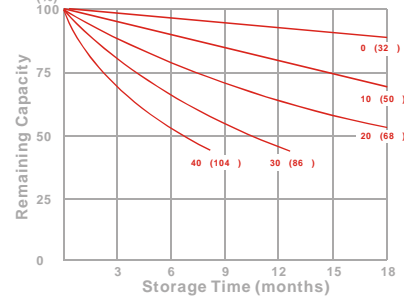

Trickle (or float) Service Life



Cycle Service Life

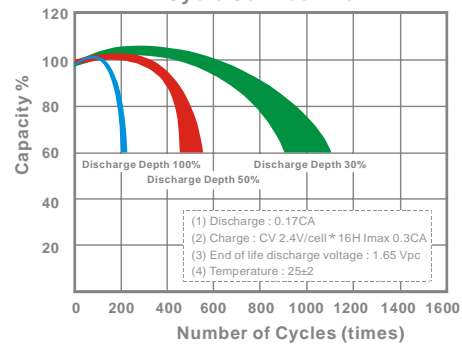

- PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25 (77)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	67.9	75.5	81.2	87.0	89.7	92.3	97.3
10	min	50.3	54.8	57.2	59.6	60.5	61.9	63.4
15	min	39.1	41.5	43.1	44.6	45.0	45.9	47.1
30	min	22.7	24.1	25.1	25.9	26.2	26.4	26.8
60	min	15.9	16.4	16.8	17.2	17.5	17.7	17.8
120	min	8.76	9.06	9.18	9.28	9.32	9.37	9.45
180	min	5.77	5.98	6.17	6.32	6.38	6.47	6.54
240	min	4.86	4.96	5.04	5.14	5.20	5.28	5.35
300	min	4.07	4.19	4.29	4.41	4.45	4.49	4.60
600	min	2.41	2.47	2.51	2.53	2.55	2.57	2.59
1200	min	1.22	1.23	1.27	1.29	1.31	1.32	1.35

- Discharge Rates in Amperes to Various End Voltages at 25 (77)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	38.5	42.7	45.8	49.0	50.4	51.9	54.7
10	min	27.2	29.6	30.9	32.2	32.7	33.4	34.2
15	min	20.2	21.5	22.3	23.1	23.4	23.7	24.4
30	min	11.6	12.3	12.8	13.2	13.3	13.5	13.7
60	min	8.24	8.43	8.55	8.66	8.71	8.77	8.85
120	min	4.27	4.42	4.53	4.62	4.65	4.69	4.74
180	min	2.89	3.08	3.15	3.21	3.24	3.27	3.31
240	min	2.40	2.45	2.49	2.54	2.57	2.60	2.64
300	min	1.98	2.06	2.12	2.18	2.20	2.23	2.27
600	min	1.17	1.20	1.22	1.24	1.25	1.26	1.27
1200	min	0.599	0.606	0.625	0.634	0.641	0.649	0.663

All data on the spec. sheet is an average value:

The tolerance range : X<6min(+15%~-15%), 6min X<10min(+12%~-12%), 10min X < 60min(+8%~-8%), X > 60min(+5%~-5%)

031016-1F